


Regal Sliding Screen – Face fitting instructions.

Your face fitting Regal Sliding unit subframe will be supplied fully assembled and ready to fit.


The sliding track channels will be already fixed to the subframe. Please note the deeper channel goes to the top.

Regal uPVC Top Sliding Track


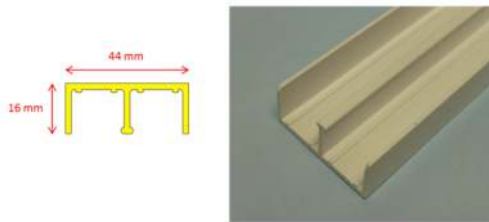


8830.1 White 2500mm Length

Regal uPVC Bottom Sliding Track

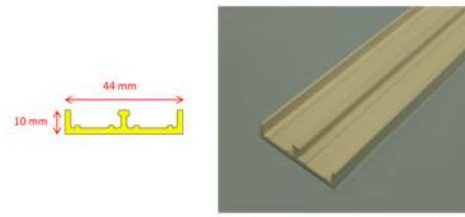

8820.1 White 2500mm Length

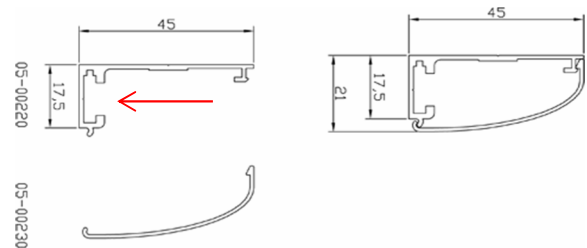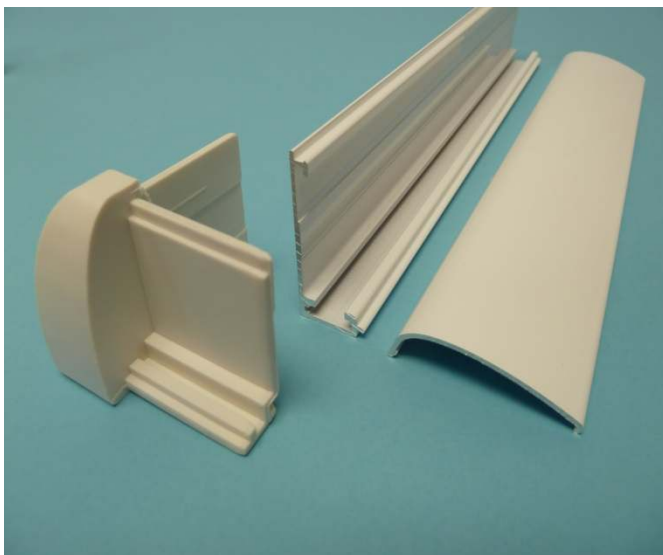

- Unclip the rounded outer profile.
- Ensure deeper track channel (fitted to profile) is to the top
- Drill and fix direct to frame
- Re-clip the outer profile.

Once the subframe is fixed into place, simply lift in the panels into place. Push the panel up into the top track and gently drop down into the bottom track. The handles can then be fitted to suit the application.

For cleaning, lift the panels out and sponge with a mild detergent solution. Let dry before re-fitting the panels.